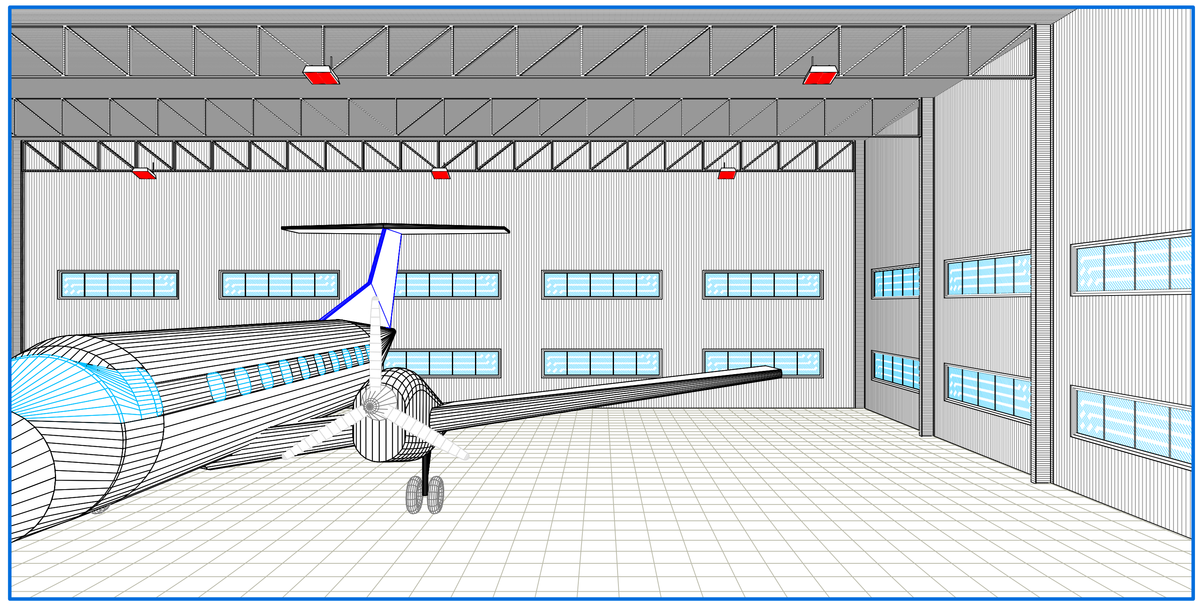

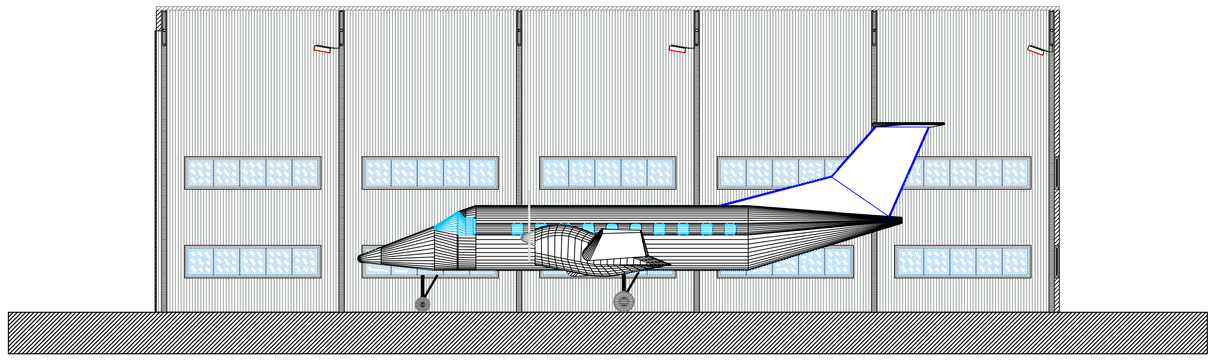

Coupe BB

Zone 1

FOR THE PROPER OPERATION OF THE HEATING SYSTEM, ALLOW AIR RENEWAL RATE 10 m3 /h

PER kW INSTALLED : 2 430 m3/h

INSTALLATION OF CERAMIC HEATERS



B64-2SX from n° 1 to 3 h : 9,00 m i : 20°

B64-2SX from n° 4 to 9 h : 9,00 m i : 10°

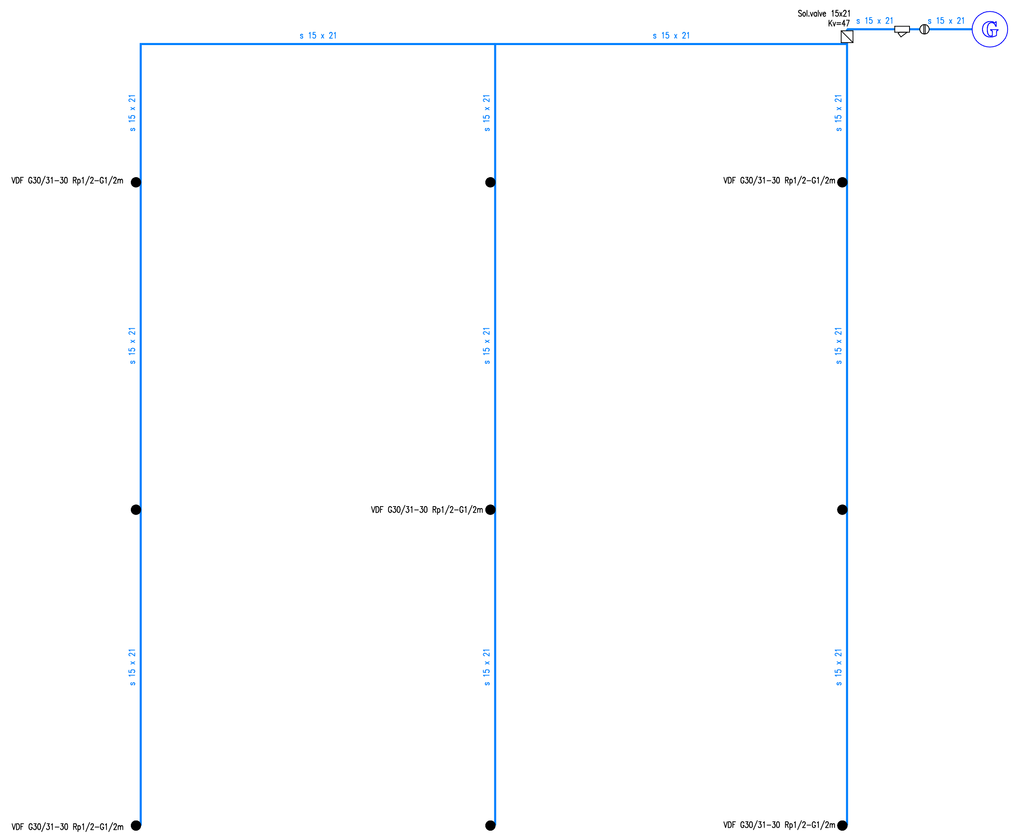

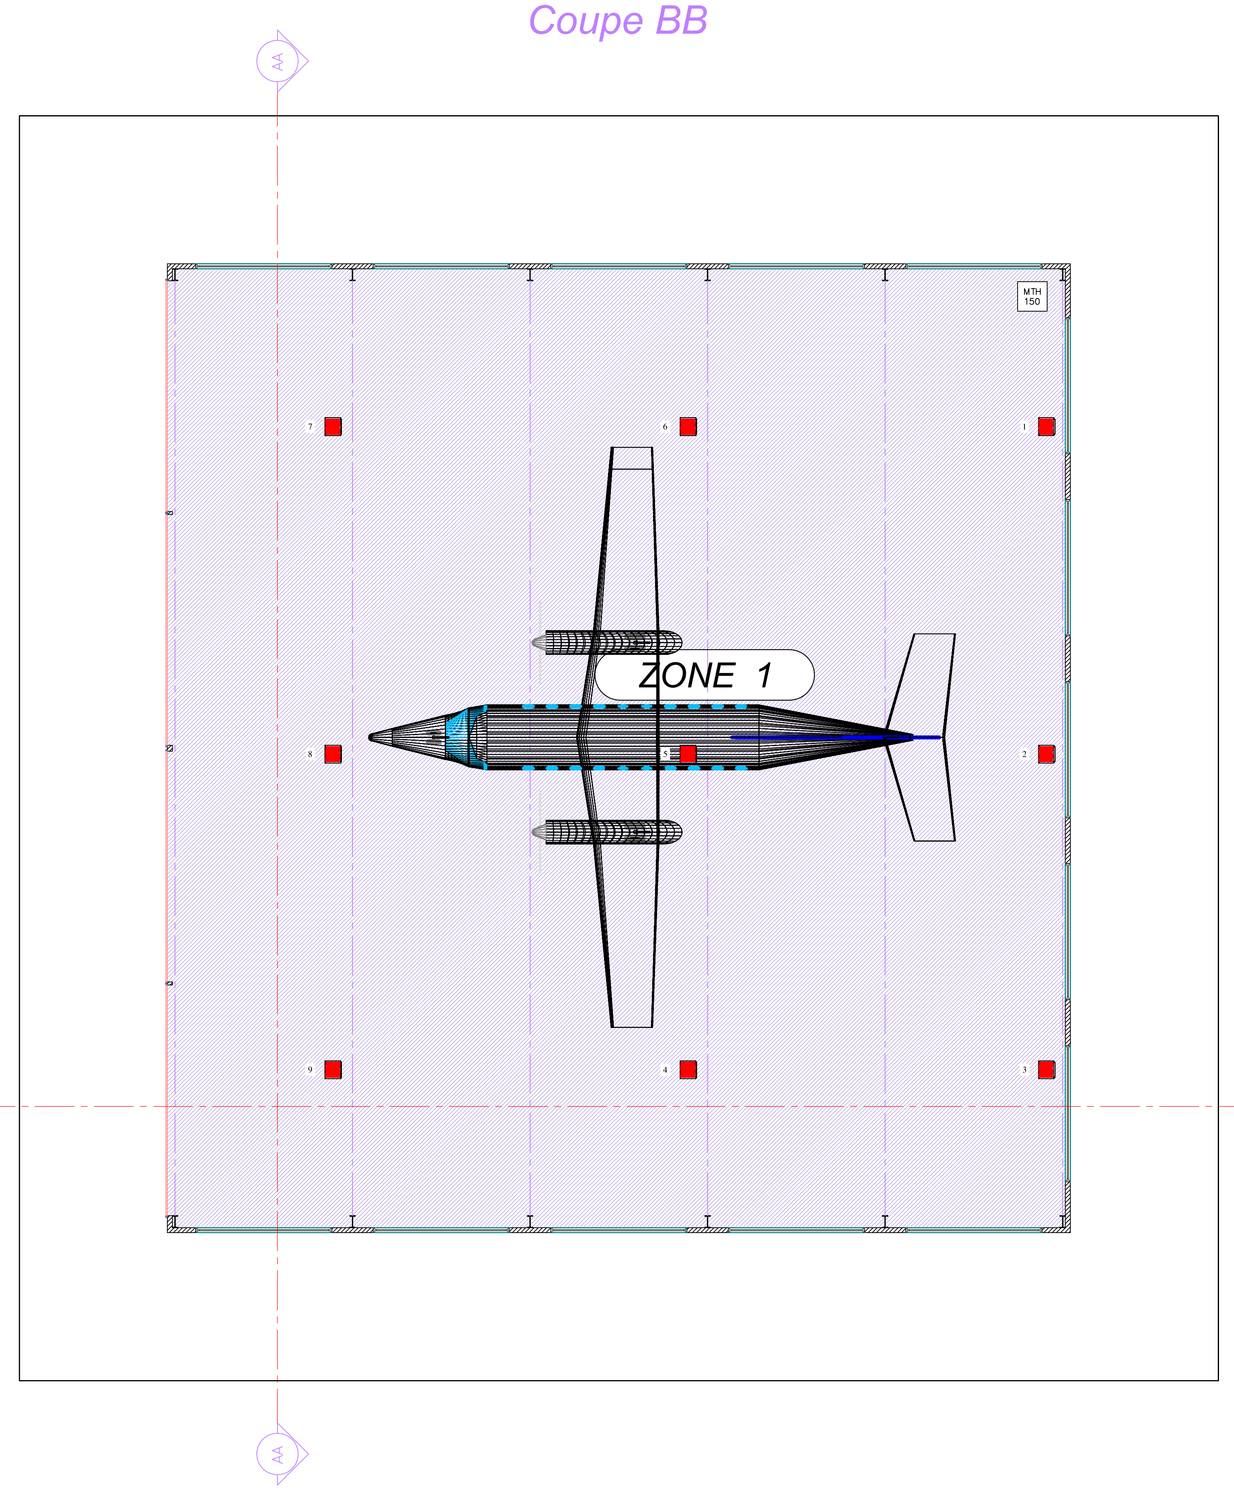

Coupe AA

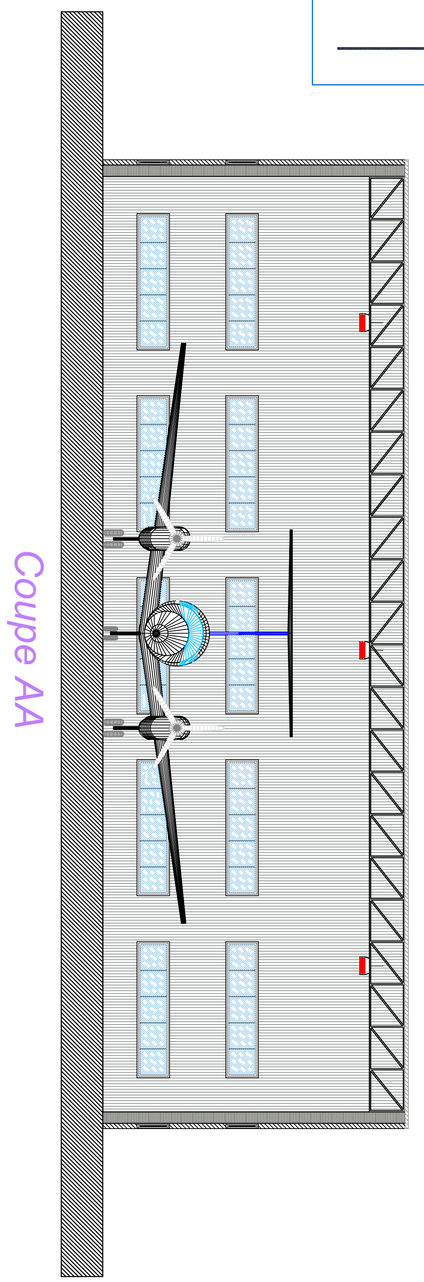

EXAMPLE OF A BRACKET TO BE MANUFACTURED BY THE INSTALLER

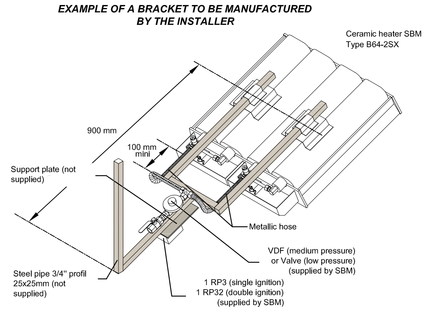

PRELIMINARY PROJECT

PAVLOGRAD-TEPLO

INDEX	DATE	REVISION

– THIS HEATING SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE RULES AND REGULATIONS, AND IN WELL VENTILATED PREMISES

SOCIETE
BOURGUIGNONNE DE
MECANIQUE

SBM 21490 CLENAY
TEL : (+33) 3.80.76.74.84
FAX : (+33) 3.80.76.74.89

SURVEY N° C18302

URGA AVIA

HEATING BY CERAMIC HEATERS WITH THERMOSTATIC REGULATION

TYPE OF GAS: G31

CAPACITY INSTALLED (Hi) : 243 kW

GAS INLET PRESSURE AT HEATER : 30 mbar

DELIVERY PRESSURE AT (G) POINT : 1,50 bar

COMFORT TEMPERATURE : +18°C by −16°C (doors and openings closed)

POWER SUPPLY : 230V single phase

SCALE : 1/100

DATE : 21/01/2015

DRAWN BY : F. COLOMBAIN